



**III. METROLOGY**

---

**THERE IS MEASURE IN ALL THINGS.**

**HORACE  
SATIRES, BOOK I, 35 B.C.**

---



**III. METROLOGY  
INTRODUCTION**

**II.A**

## **Metrology**

**Metrology is presented in the following major topic areas:**

- **Introduction**
- **Common Gages & Instruments**
- **Special Gages**
- **Gage Selection & Use**
- **Surface Plate Tools**
- **Specialized Equipment**

**Common Gages & Measuring Instruments is divided into the following subject areas:**

- **Variable Gages**
- **Attribute Gages**
- **Transfer Gages**
- **Measurement Scales**



**III. METROLOGY  
INTRODUCTION**

**II.A**

## **Introduction**

**Metrology is the science of measurement. The word metrology derives from two Greek words: matron (meaning measure) and logos (meaning logic). Metrology encompasses the following key elements:**

- The establishment of measurement standards that are both internationally accepted and definable**
- The use of measuring equipment to correlate the extent that product and process data conforms to specification**
- The regular calibration of measuring equipment, traceable to established international standards**


III. METROLOGY  
COMMON GAGES / VARIABLE GAGES

II.A.1

## Variable Gages


### The Steel Rule

Steel rules and tapes are available in different degrees of accuracy and are typically graduated on both edges.

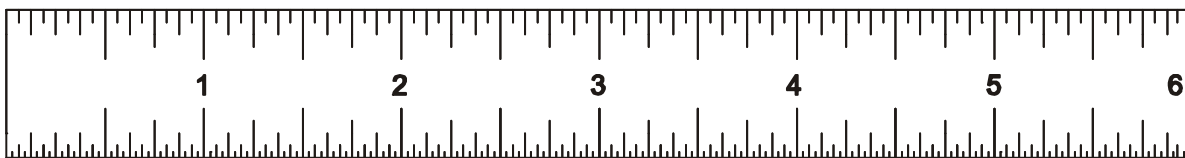


A Typical Steel Rule

The steel rule typically has discriminations of  $1/32$ ,  $1/64$ , or  $1/100$  of an inch. Measurements requiring accuracies of  $0.01$ " or finer should be performed with tools such as a digital caliper.



Incorrect

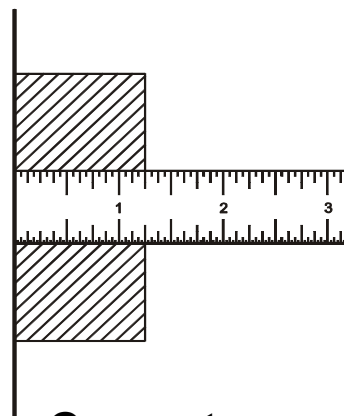

Correct


Use of a Flat Surface with a Steel Rule

III. METROLOGY  
COMMON GAGES / VARIABLE GAGES

II.A.1


## Micrometers

Micrometers normally permit a 1" reading span, thus, a 2" micrometer would allow readings from 1" to 2". Most "mics" have an accuracy of 0.001", with the addition of a vernier scale, an accuracy of 0.0001" can be obtained. Digital micrometers can be read to 50 millionths of an inch.

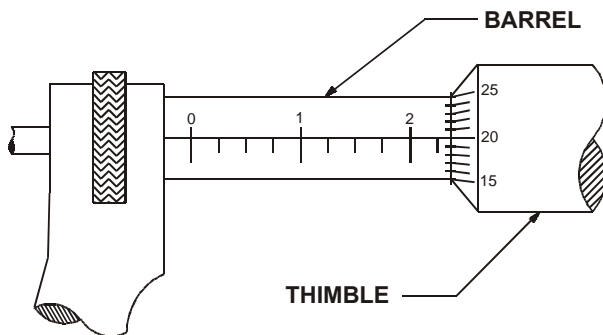

**Micrometer set at 0.245"**

0.200"  
+0.025"  
+0.020"  
0.245"

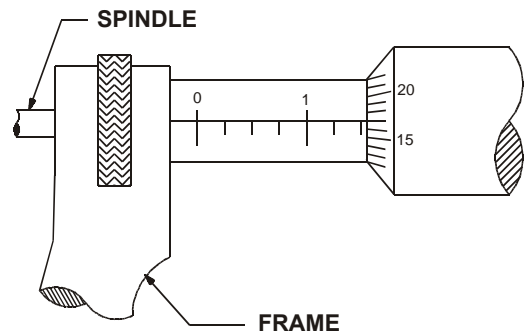

**Micrometer set at 0.167"**


0.100"  
+0.050"  
+0.017"  
+0.167"

### Two Micrometer Reading Examples

III. METROLOGY  
COMMON GAGES / VARIABLE GAGES

II.A.1

## Three-Wire Method for Pitch Diameter

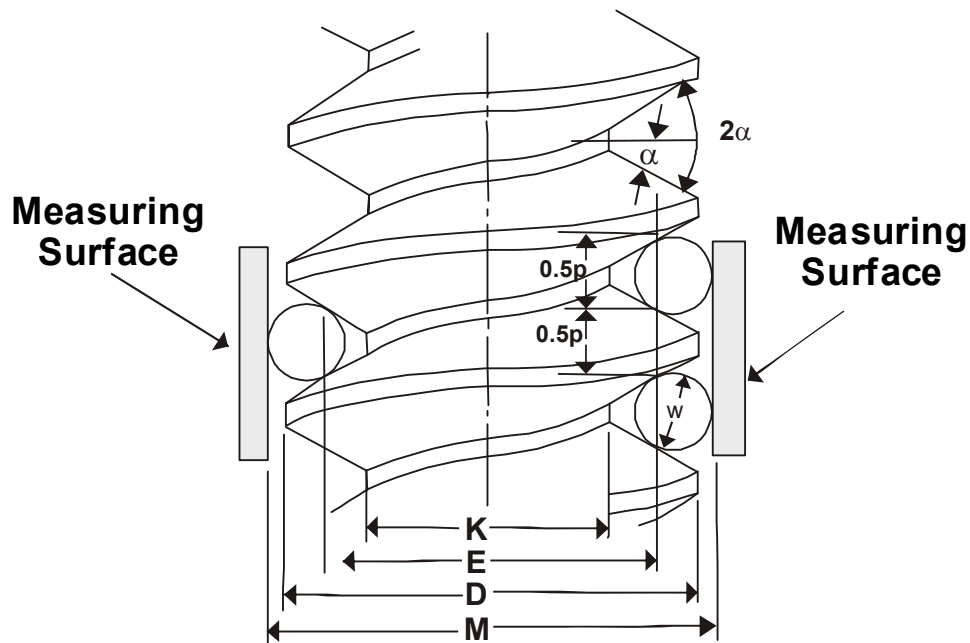

An Illustration of Three Wire Measurement

The best wire size may be calculated by:

$$w = 0.5p \sec \alpha$$

Where:  $w$  = wire diameter

$\alpha$  = 1/2 the included thread angle

$p$  = thread pitch

For a  $60^\circ$  thread:

$$w = 0.57735 p$$

$$p = \text{the thread pitch} = \frac{1 \text{ inch}}{\text{no. of threads/inch}}$$



III. METROLOGY  
COMMON GAGES / VARIABLE GAGES

II.A.1

## Three-Wire Method (Continued)

The formula to calculate the pitch diameter after measurement is:

$$E = M + (0.86603p) - 3W$$

Where: E = pitch diameter  
p = thread pitch  
M = over the wire measurement  
W = wire size used

**Example: Assume that M is 0.360", p is 0.050" and W is 0.030". Calculate the pitch diameter.**

$$\begin{aligned} E &= M + (0.86603p) - 3W \\ E &= 0.360 + (0.86603 \times 0.050) - 3(0.030) \\ E &= 0.360 + 0.0433 - 0.090 \\ E &= 0.3133 \text{ inch} \end{aligned}$$

**E is the pitch diameter.**



III. METROLOGY  
COMMON GAGES / VARIABLE GAGES

II.A.1

## Gage Blocks

Carl Johansson of Sweden developed steel gage blocks or “Jo” blocks to an accuracy within a few millionths of an inch. Today gage blocks are used in almost every shop manufacturing a product requiring mechanical inspection. They are used to set a length dimension for a transfer measurement, and for calibration of a number of other tools.

ANSI/ASME B89.1.9, *Gage Blocks*, distinguishes three forms - rectangular, square and round. Gage blocks are made from high carbon or chromium alloyed steel, tungsten carbide, chromium carbide, or fused quartz.

Federal Accuracy Grades		Accuracy In Length
New Designation	Old Designation	
0.5	AAA	± 0.000001
1	AA	± 0.000002
2	A+	+ 0.000004 - 0.000002
3	A & B	+ 0.000008 - 0.000004


### Gage Block Grades

III. METROLOGY  
COMMON GAGES / VARIABLE GAGES


II.A.1

## Gage Blocks (Continued)


Block stacks are assembled by a wringing process which attaches the blocks by a combination of molecular attraction and the adhesive effect of a very thin oil film. The sequential steps for the wringing of rectangular blocks is shown below. Light pressure is used throughout the process.




**Hold  
Crosswise**



**Swivel the  
Pieces**



**Slip into  
Position**



**Finished  
Stack**

**Illustration of the Wringing of Gage Blocks**



III. METROLOGY  
COMMON GAGES / VARIABLE GAGES

II.A.1

## Gage Blocks (Continued)

### Gage Block Sets

Typical gage block sets vary from 8 to 81 pieces based upon the needed application. Listed below are the contents of a typical 81 piece set:

Ten-thousands blocks (9) 0.1001, 0.1002 ... 0.1009

One-thousands blocks (49) 0.101, 0.102 ... 0.149

Fifty-thousands blocks (19) 0.050, 0.100 ... 0.950

One inch blocks (4) 1.000, 2.000, 3.000, 4.000

Also included in the set, are two wear blocks that are either 0.050" or 0.100" in thickness.

### Minimum Stacking

2.5834	(desired total)
- 0.1004	(use 0.1004" block)
2.483	
- 0.133	(use 0.133" block)
2.350	
- 0.350	(use 0.350" block)
2.000	(use 2.000" block)



**III. METROLOGY  
COMMON GAGES / ATTRIBUTE GAGES**

**II.A.2**

## **Attribute Gages**

**Attribute gages are fixed gages which typically are used to make a go, no-go decision. Attribute data indicates only whether a product is good or bad. Attribute gages are quick and easy to use.**

## **Snap Gages**


**Snap gages are used to check outside dimensions in high volume operations. These gages may have provisions for a small range of adjustments and can be used to make rapid “go, no-go” decisions.**

III. METROLOGY  
COMMON GAGES / ATTRIBUTE GAGES


II.A.2

## Ring Gages

Ring gages are used to check external cylindrical dimensions, and may also be used to check tapered, straight, or threaded dimensions. A pair of ring gages inserted in a holder as “go”, “no-go” gages. A groove is often cut in the outer surface of the “no-go” gage to provide distinction.

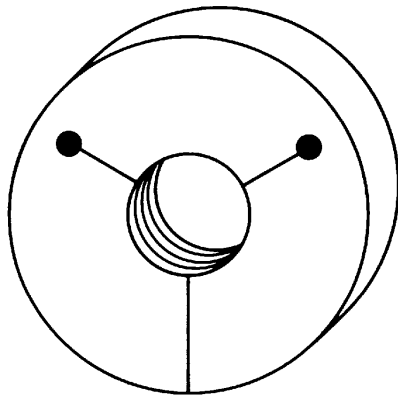

A No-go Thread Ring Gage

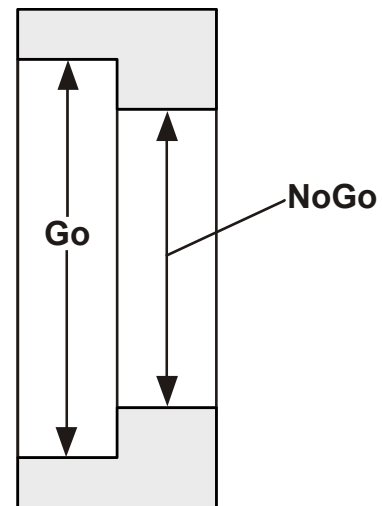

Progressive Ring Gage




III. METROLOGY  
COMMON GAGES / ATTRIBUTE GAGES

II.A.2

## Plug Gages

Plug gages are generally “go, no-go” gages, and are used to check internal dimensions. The “go, no-go” set is usually held in a hexagonal holder. The “no-go” plug is generally made shorter.

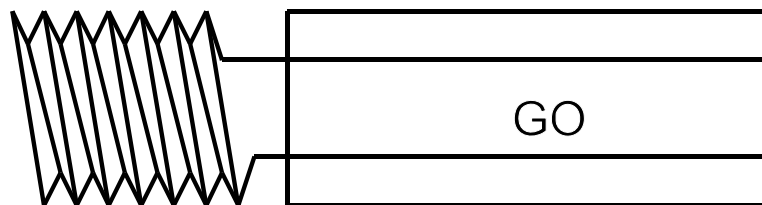


**A Thread Plug Gage**

III. METROLOGY  
COMMON GAGES / TRANSFER GAGES


II.A.3

## Spring Calipers

A spring caliper measurement is typically transferred to a steel rule by holding the rule vertically on a flat surface. The caliper ends are placed against the rule for the final readings.

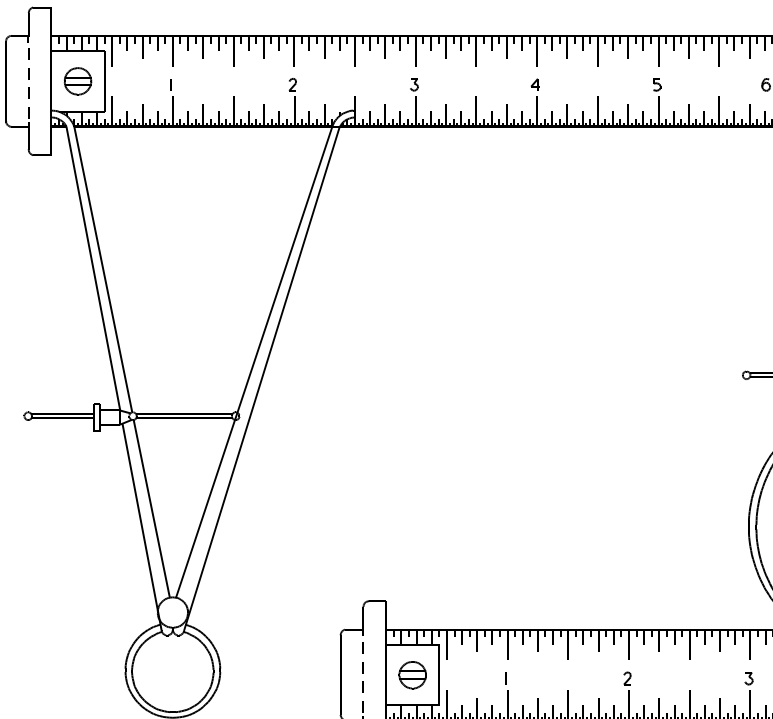

**Inside Calipers**

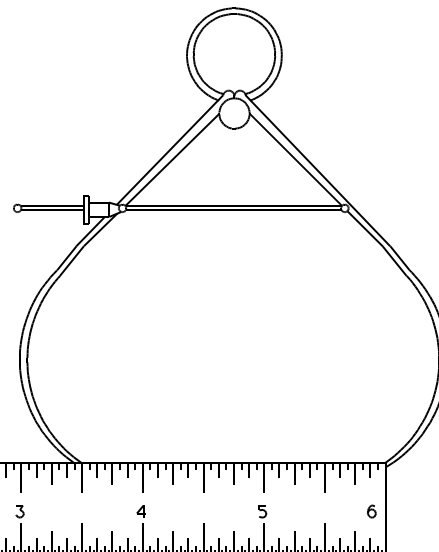

**Outside Calipers**

### Spring Caliper Applications